


OSD OIL SUCTION AND DELIVERY HOSE

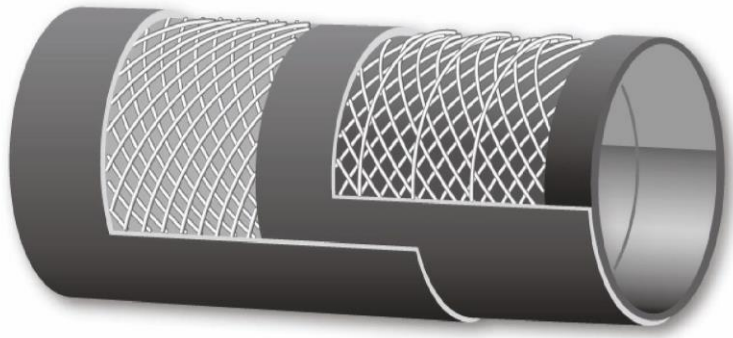

TECHNICAL CHARACTERISTICS

SPECIFICATION: N/A

APPLICATION: Transfer of oil based products at up to 150 psi or for vacuum. Also suitable for use with SCR (Selective Catalytic Reduction) additives.

TUBE: NBR

REINFORCEMENT: Synthetic textile with two helix wires. Embedded with one antistatic (copper) wire.

COVER: CR / NBR Blended

TEMPERATURE RANGE: -40 degrees C to +90 degrees C

SAFETY FACTOR: 3:1

BRANDING: W =150 PSI (10 BAR) ID*OD OIL PETROLEUM SUCTION AND DELIVERY (red tape / black letters)

	ID	O.D	W.P	W.P	BR	COIL LENGTH
Inch	mm	mm	BAR	PSI	mm	mt
3/4"	19	30	10	150	75	40
1"	25	35	10	150	100	40
1 1/4"	32	42	10	150	125	40
1 1/2"	38	48	10	150	150	40
1 3/4"	45	56	10	150	180	40
2"	51	62	10	150	205	40
2 1/4"	57	69	10	150	230	40
2 1/2"	63	78	10	150	255	40
3"	76	89	10	150	305	40
4"	102	117	10	150	405	40

In response to previous customer enquiries, our suppliers have advised that this hose is:

- Compatible with Diesel and suitable to be submerged in Diesel
- Suitable to transfer E10 fuel